



Uncertainty Quantification on High-speed Railway Dynamics

Bigoni, Daniele; Engsig-Karup, Allan Peter; True, Hans

Publication date:
2012

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Bigoni, D., Engsig-Karup, A. P., & True, H. (2012). *Uncertainty Quantification on High-speed Railway Dynamics*. Poster session presented at Uncertainty Quantification for High-Performance Computing Workshop, Oak Ridge, Tennessee, United States.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Uncertainty Quantification on High-speed Railway Dynamics

Daniele Bigoni¹, Allan P. Engsig-Karup, Hans True

¹Corresponding author: dabi@imm.dtu.dk

Introduction

Modern developments in railway vehicle dynamics are boosting the idea of running faster trains with improved safety. Important contributions to these developments are being given by precise numerical approximations. The Newton-Euler formulation of vehicle models always contain nonlinearities due to the wheel-rail contact forces and components in the suspension system. These make the solution of these systems computationally challenging [4]. On the other hand, the nonlinear terms in these systems have a critical influence on the dynamics and cannot be neglected. Model parameters of the vehicle as well as track irregularities are often known within a certain degree of accuracy due to measurement errors. It is then fundamental to try and detect the parameters that can be critical for the riding safety. The goal of this work is to employ modern uncertainty quantification techniques (e.g. generalized Polynomial Chaos) in order to obtain estimates of the sensitivity of the dynamics to such parameters which can then be taken into account in vehicle designs.

The model

The study focuses first on a simplified model [3] (see fig. 1) formed by a wheel set connected to the car body by a spring, with stiffness K_s , and a dry friction damper, with static and dynamic friction coefficients ν and μ . The model runs on an irregular straight track, where the irregularities are described by a sinusoidal function. The investigation is restricted to the lateral (x_1) and the yaw (x_3) dynamics, that can be expressed by the nonlinear system in (1). A complete realistic railway wagon model [1] will be used for more complex investigations. The model considers 35 degrees of freedom (66 nonlinear ODEs).

$$\begin{cases} \dot{x}_1 = \tilde{x}_2 \\ \dot{x}_2 = \frac{F_{in} + F_d}{m} \\ \dot{x}_3 = x_4 \\ \dot{x}_4 = \frac{-2AF_y}{I} \end{cases} \quad (1)$$

$$\begin{aligned} \tilde{x}_1 &= x_1 + a \sin\left(\frac{2\pi V}{l}t\right), & \tilde{x}_2 &= x_2 + a \frac{2\pi V}{l} \cos\left(\frac{2\pi V}{l}t\right) \\ F_{in} &= -2F_x - 2K_s \tilde{x}_1, & F_{sl} &= -\text{sign}(\tilde{x}_2) \mu_d N \\ F_{st} &= \begin{cases} -\text{sign}(F_{in}) \mu_s N & |F_{in}| > \mu_s N \\ -F_{in} & |F_{in}| \leq \mu_s N \end{cases} \\ F_d &= F_{st} \text{sech}(\alpha \tilde{x}_2) + F_{sl}(1 - \text{sech}(\alpha \tilde{x}_2)) \\ F_x &= \frac{\xi_x F_r}{\Psi \xi_r}, & F_y &= \frac{\xi_y F_r}{\Phi \xi_r}, & F_r &= \begin{cases} \xi_r C \left(1 - \frac{C \xi_r}{3\mu_t} + \frac{C^2 \xi_r^2}{27\mu_t^2}\right) & \text{if } C \xi_r < 3\mu_t \\ \mu_t & \text{otherwise} \end{cases} \\ \xi_x &= \frac{\tilde{x}_2}{V} - x_3, & \xi_y &= \frac{Ax_4}{V} + \frac{\lambda \tilde{x}_1}{r_0}, & \xi_r &= \sqrt{\left(\frac{\xi_x}{\Psi}\right)^2 + \left(\frac{\xi_y}{\Phi}\right)^2} \end{aligned}$$

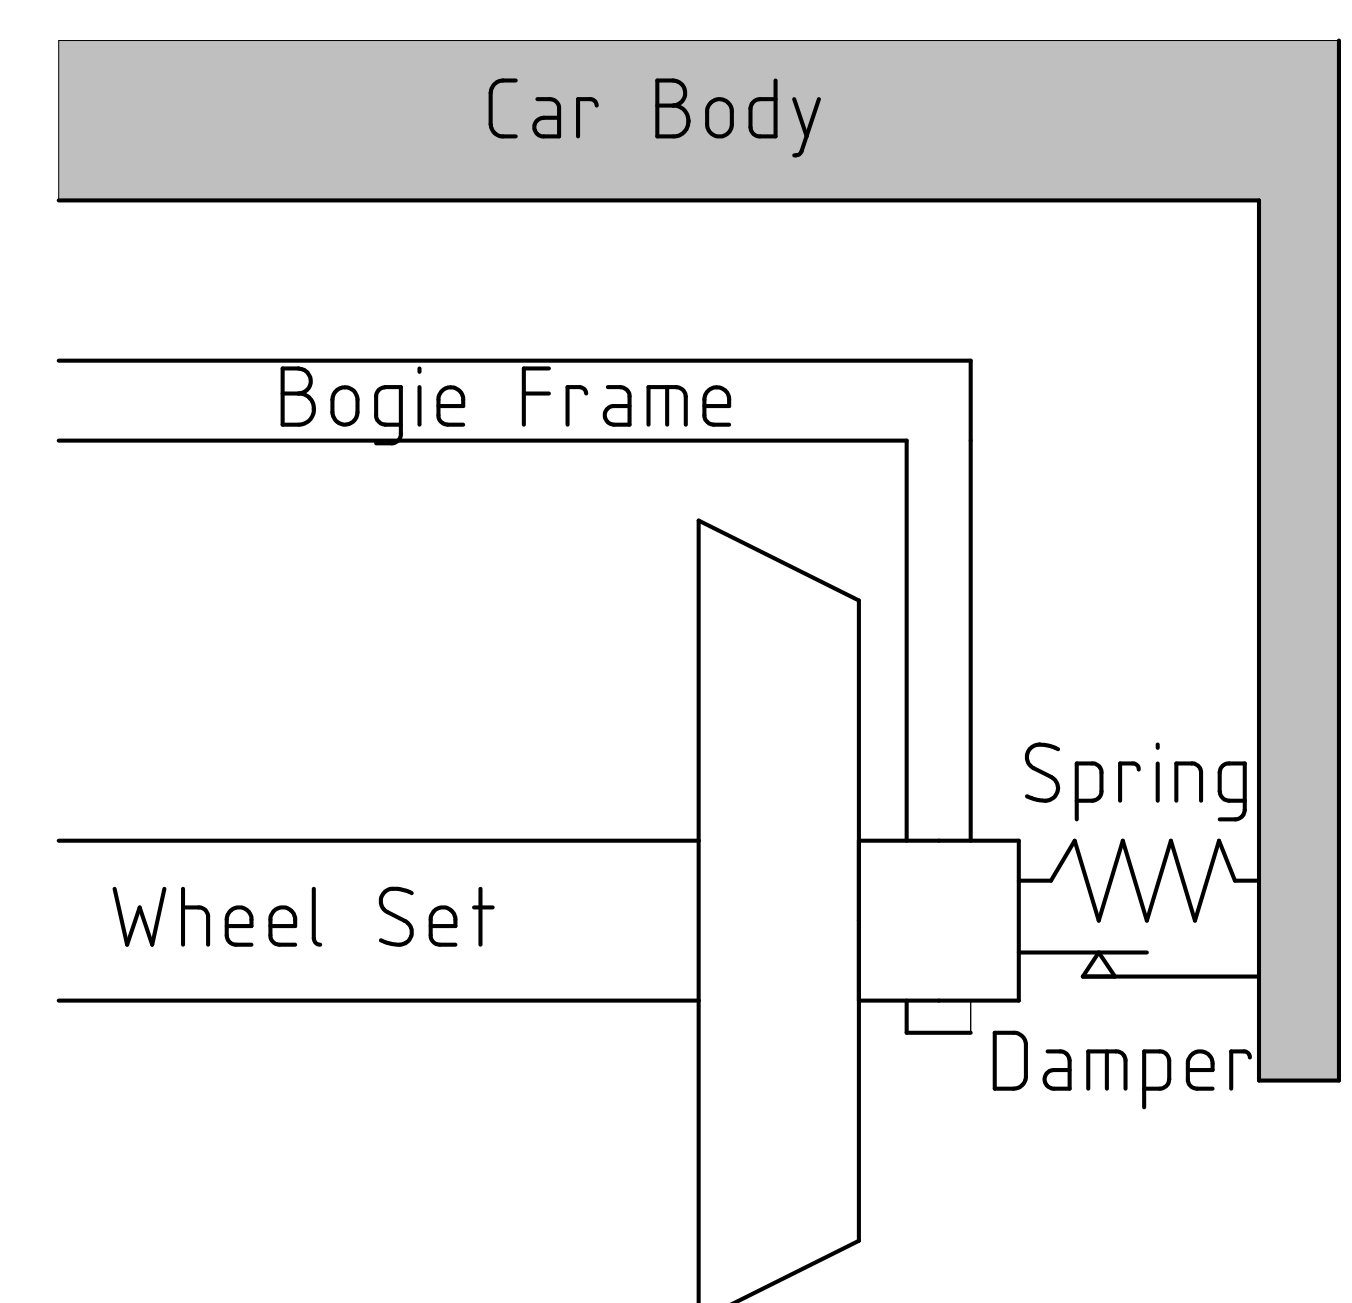


Figure 1: Simplified model.

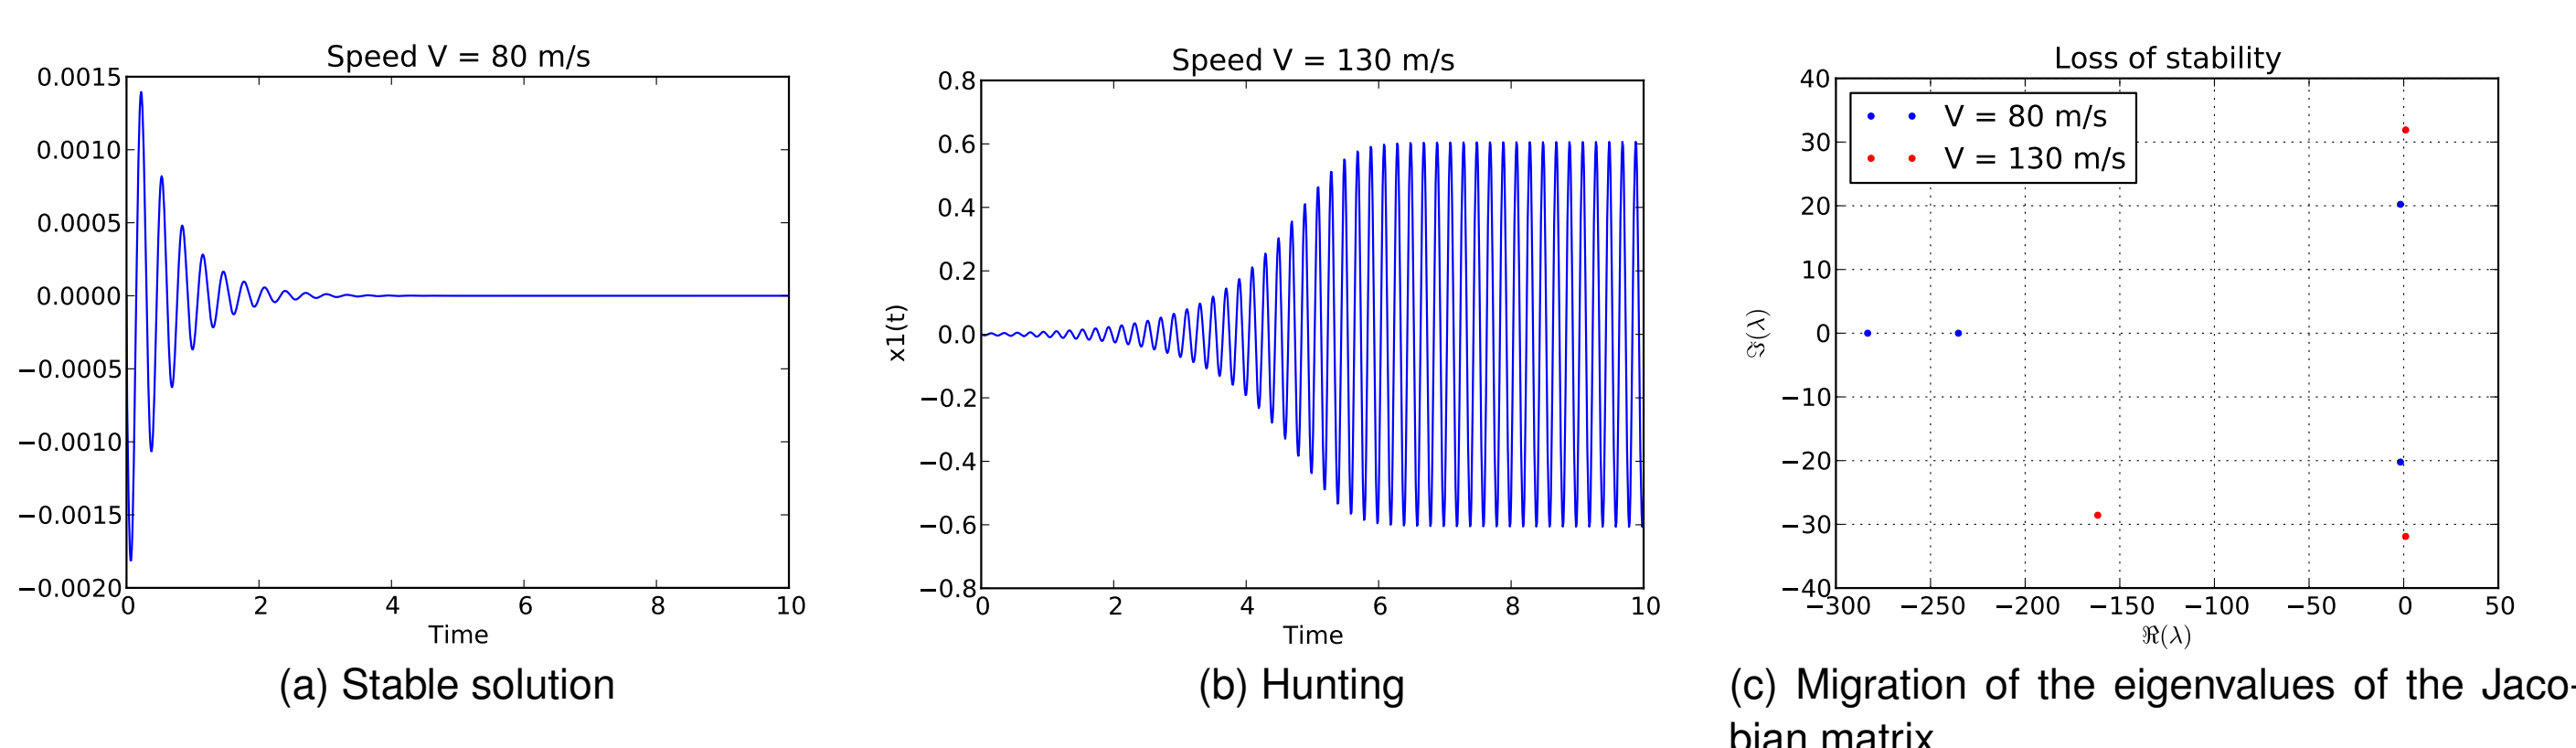


Figure 2: Loss of stability of the centered solution above the linear critical speed (Hopf bifurcation) on the simplified model. Here, the dry friction damper and the sinusoidal irregularities of the track are disregarded.

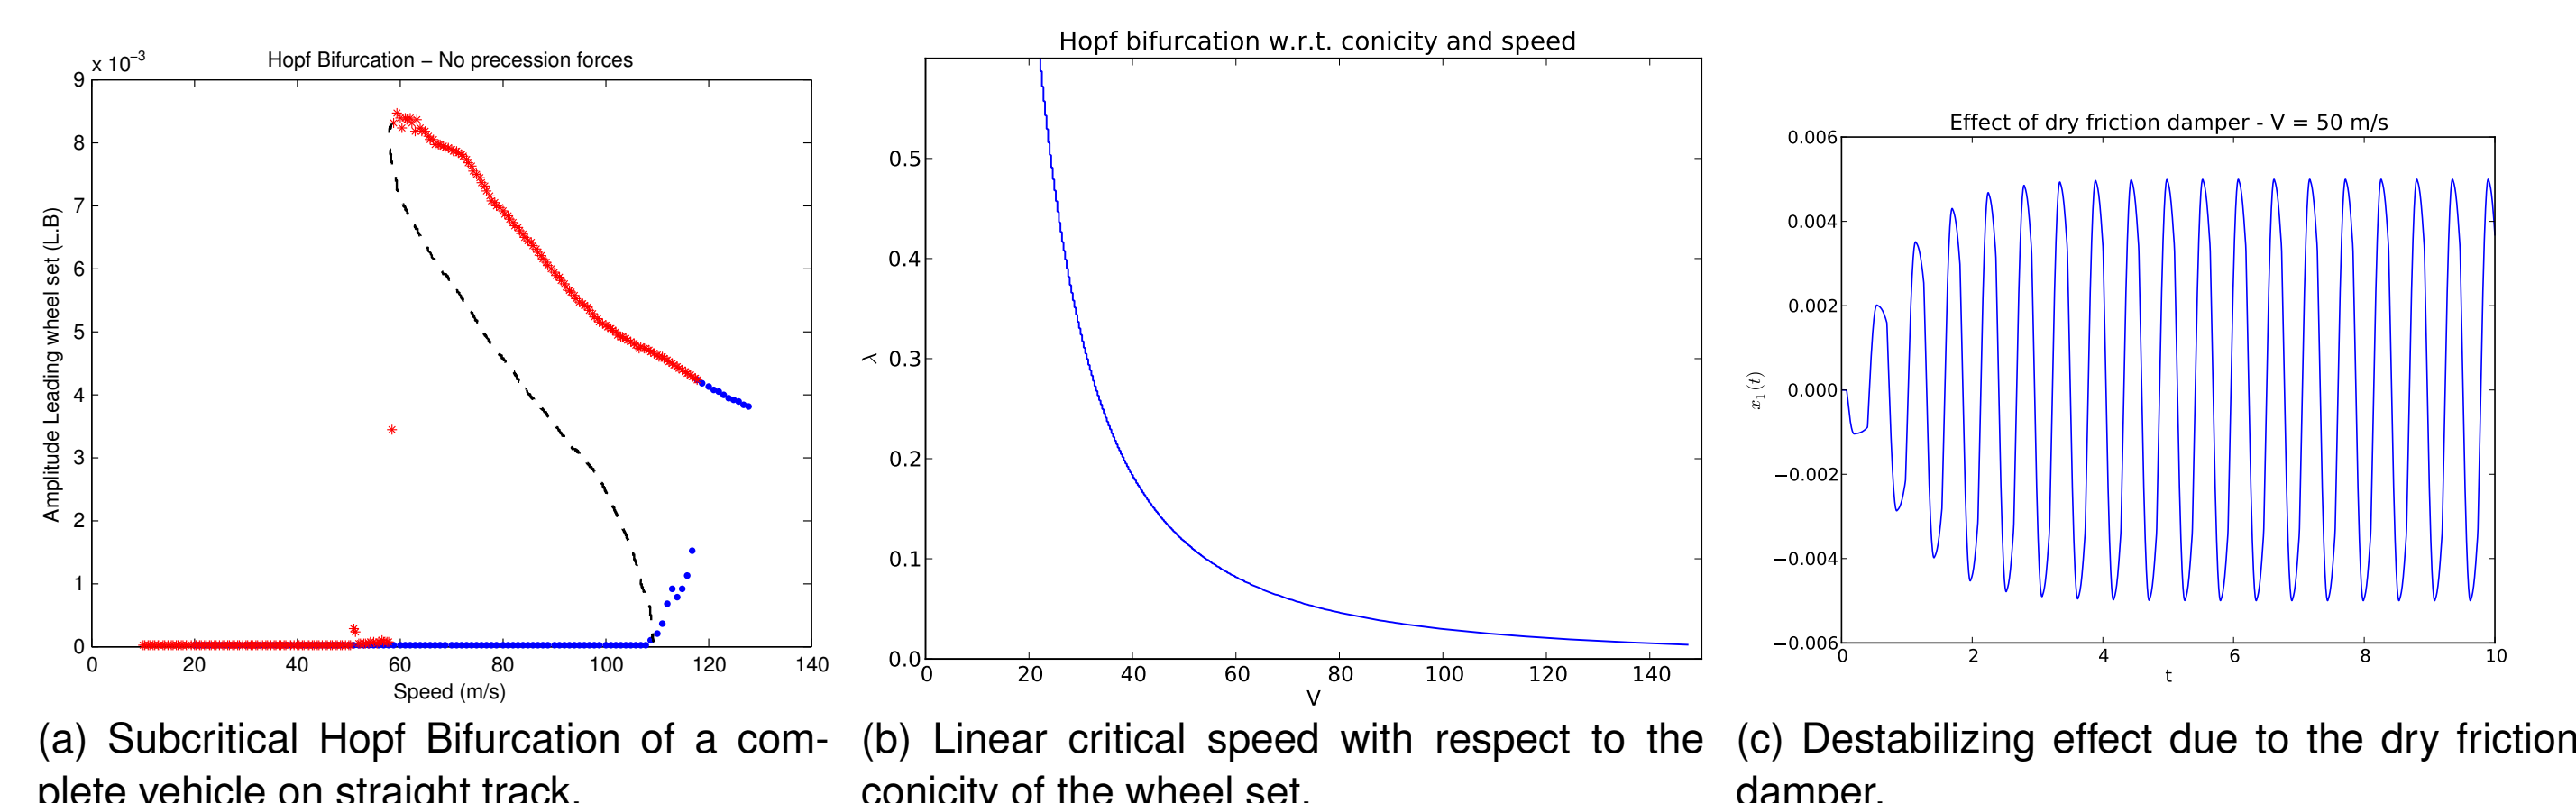


Figure 3: Nonlinear dynamics effects

Uncertainty Quantification

In the vehicle industry all the parameters of the components of the suspension system are known within certain tolerances, due to measurement errors as well as wear. In the railway industry the irregularities of the rails should be considered as well. In the simple model described by (1) these deformations were described by sinusoidal functions for simplicity. In reality track irregularities have a more complex pattern that can be described by stochastic processes.

The figures in 4 show the Monte Carlo approach in the detection of the linear critical speed with respect to the stiffness value of the lateral spring. The detection of linear critical speed is not computationally expensive and can be done observing the migration of the eigenvalues of the Jacobian as shown in fig. 2c, so the slow convergence of the Monte Carlo approach is acceptable. On the contrary, the nonlinear critical speed can only be obtained calculating all the dynamics with respect to the speed, thus alternative techniques are required for the computation of the statistics.

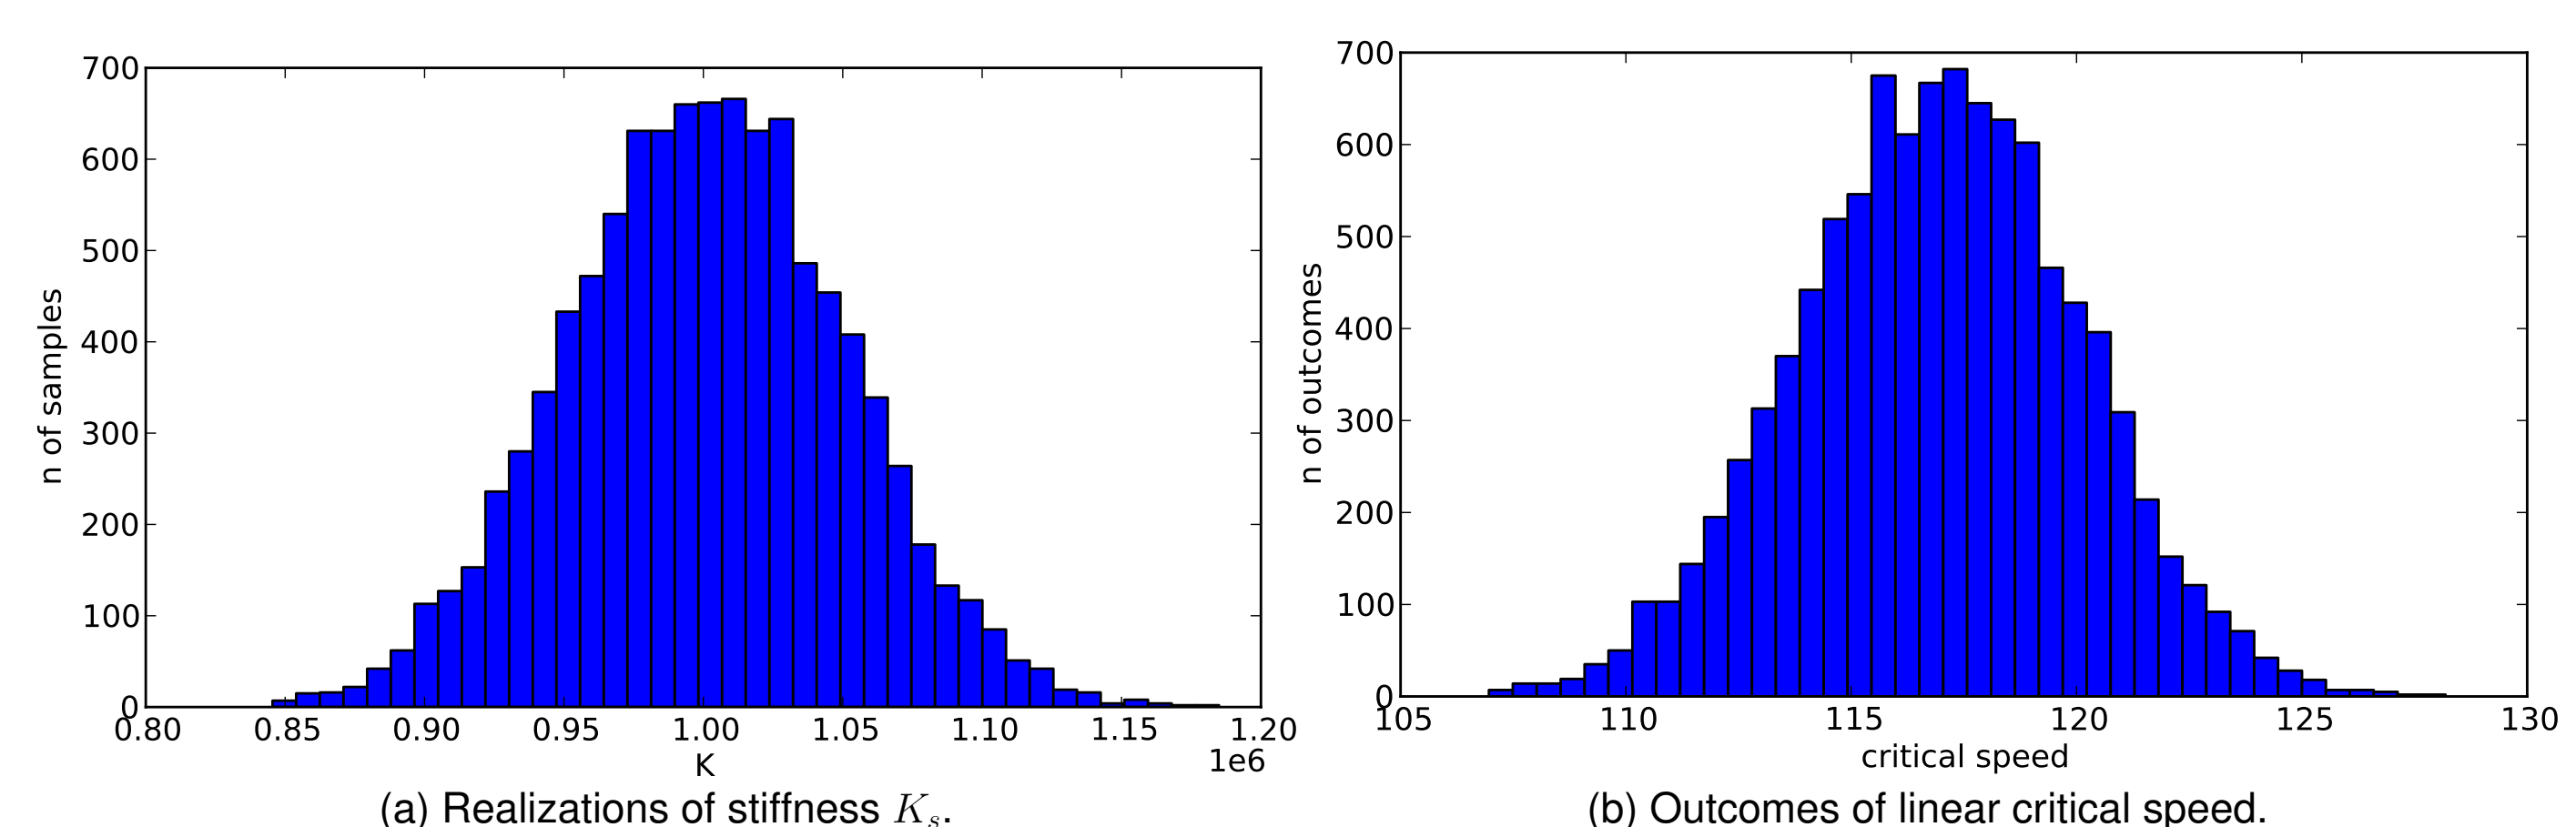


Figure 4: Detection of the linear critical speed of the simplified model using Monte Carlo method.

References

- [1] BIGONI, D. Curving Dynamics in High Speed Trains. Master's thesis, IMM, The Technical University of Denmark, Kongens Lyngby, Denmark, 2011.
- [2] TRUE, H. On the theory of nonlinear dynamics and its applications in vehicle systems dynamics. *Vehicle System Dynamics* 37, 5-6 (1999), 393-421.
- [3] TRUE, H., AND ASMUND, R. The dynamics of a railway freight wagon wheelset with dry friction damping. *Vehicle System Dynamics* 38 (2002), 149-163.
- [4] TRUE, H., ENGSIG-KARUP, A. P., AND BIGONI, D. On the numerical and computational aspects of non-smoothnesses that occur in railway vehicle dynamics. *Mathematics and Computers in Simulation* (2011). Submitted.